



河南省振源科技有限公司
Henan Zhenyuan Science & Technology Co.,Ltd.

Add: National Xinxiang Economical&Technical Development Zone

Tel: +86-373-3663336 +86-373-3663285 Fax: +86-373-3663296

Email: info@cementcrusher.com

Website: www.cementcrusher.com

河南省振源科技有限公司
Henan Zhenyuan Science & Technology Co.,Ltd.



企业简介

Enterprise Introduction



河南省振源科技有限公司，是专业从事矿用机械设备的国家级高新技术企业，主要产品有：破碎站、双齿辊破碎机、甲带给料机、大型振动筛分设备、各种系列给料设备及相关配件等。产品广泛应用于煤炭、矿山、电力、冶金、化工等行业，远销东南亚、南亚等地区。凭着质量过硬的产品和周到的服务，积累了良好的市场信誉，并获得了广大客户的信任和好评。

地处黄河之北岸，国家新乡经济技术开发区，占地面积260亩，建筑面积10.9万m²。公司现有员工690人，其中行业专家3名，高级技术人员80人，中级技术人员120人，公司总资产4.38亿元。

公司拥有科学的质量管理体系和先进的产品质量检测手段，在同行业率先通过了ISO9001质量管理体系认证，产品质量始终保持在同行业领先水平。公司拥有三十余项国家专利，曾多次荣获国家、省部级科技奖。

以“不断创新、服务至上、笃守信誉”为企业宗旨；以“创世界一流产品”为己任。公司坚持以市场为导向，以顾客满意为目的，追求卓越绩效并持续改进，以一流的产品，一流的服务创一流的业绩。热烈欢迎各界人士精诚合作，共同创造辉煌的明天，实现和谐共赢！

Henan Zhenyuan Science & Technology Co.,Ltd. Is a hi-tech enterprise specializing in manufacturing mining machinery, Our main products include:crushing station, 2PLF teeth-roller crusher, armored belt feeder, large vibrating screen equipments, various series feeding equipments and related spare parts , which are widely used in coal, metallurgy, mine, electri city, chemical industry etc. Our products were exported to Southeast Asian countries, south Asian and other countries.We gained favorable comment and trust from customers with our high quality products and considerate service, winning noble reputation in the market.

Located on the north bank of the Yellow River, east of Xinxiang City.Our company occupies an area of 109,000.00 square meters, with 690 staffs, among which there are 3 specialists, 80 senior technicians and 120 middle class technicians, and capital asset ¥438,000,000.

We have scientific QC system and passed the ISO9001 quality control system, firstly among fellow companies. With advanced quality testing methods, our products in the industry has maintained the top level. More than 30 national patents have been awarded,and many science and technology prizes have been awarded by State and Provincial governments.

We abide by“ Unceasing innovation, excellent service, keeping reputation”, and always take the market as a guide, trying our best to satisfy customers, pursue super excellence and insist on continual improvement. To create prominent achievement with first-class products and first-class service. We are sincerely hope to cooperate with friends from at home and abroad to create a glorious tomorrow and realize our common aim of “Harmony and Win-win”!

服务全球
Service Worldwide



加工设备
PROCESSING EQUIPMENTS



大型立车
Heavy Duty Vertical Lathe



龙门铣床
Gantry Boring And Milling Machine



抛丸机
Shot Blasting Machine



数显落地铣镗床
Significant Number Of Boring And Milling Machine



数控加工区
CNC Processing Area





数控等离子切割机
CNC Plasma Cutting Machine

实用新型专利证书
UTILITY MODEL PROFESSIONAL CERTIFICATES



企业荣誉
COMPANY HONOR

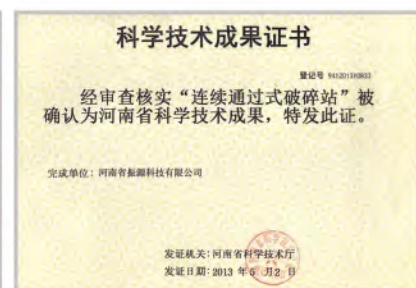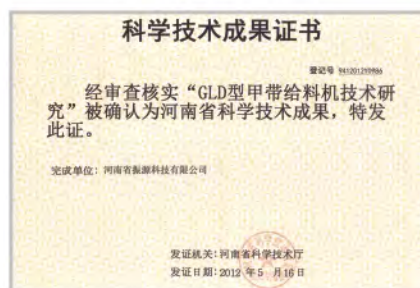

YA圆型振动筛

YA Series Circular Vibrating Screen



用途及特点 Applications and Features

我公司的YA型圆振动筛，是传统YA振动筛的改进型。可用于煤炭、冶金、交通、选矿、建材、电力和化工等行业各种物料干式分级。该系列振动筛按所处理物料的密度分为YA轻型和YAH重型两类。YA轻型振动筛的最大给料粒度为200mm，YAH重型振动筛的最大给料粒度为400mm。该振动筛采用轴偏心振动器，属自定中心圆振动筛。振动器采用大游隙轴承，噪声低，寿命长。零部件通用性强，维修方便。

YA series circular vibrating screen is an improvement machine based on the traditional YA series vibrating screen. It is used to make dry material classification for coal, metallurgy, road construction, mine, building material, electric power and chemicals, ect. According the density of material to be sieved, it can be divided into YA and YAH. To YA, Max feeding grain size is 200mm, but the YAH is 400mm. This vibrating screen belongs to self-centering circular vibrating screen, it adopts the vibrator with eccentric shaft, the bearing with large clearance are installed in vibrator inside, low noise and long operating life, easy to maintain.

选用注意事项 Notes

1. 筛面分单层、双层和三层三种。
 2. 筛面可选用冲孔、编织、聚氨酯、棒条等多种筛网。
 3. 电机可安装在筛机的左侧或右侧(站在振动筛入料端后部看，左手边方向即为左装，右手边方向为右装)。
 4. 筛下给料箱为选择件，正常供货时不带筛下给料箱。
 5. 基础螺栓或预埋钢板由用户自备。
1. Screens can be single, double and three decks.
 2. Sieving surface structure can choose punching, weaving, polyurethane or bar strip.
 3. The electromotor can be mounted at the left or the right of the screen machine.
 4. Feeding box is alternative. It will not be supplied if there is no request.
 5. Foundation bolts or embedded steel plate owned by the user.

技术参数 Technical Parameters

型号 Model	筛面 Screening Surface			给料粒度 Feeding Grain Size (mm)	生产能力 Capacity(t/h)	振动次数 Vibration Time (r/min)	双振幅 Double-Amplitude (mm)	电机 Motor	
	层数 Decks	面积 Area (m ²)	筛孔尺寸 Mesh size (mm)					功率 Power (Kw)	数量 Qty
YA1536	1	5.4	6-50	≤200	100-200	730	8-11	7.5	1
2YA1536	2	5.4	6-50	≤200	150-250	730	8-11	11	1
YA1542	1	6.5	6-50	≤200	110-220	730	8-11	7.5	1
2YA1542	2	6.5	6-50	≤200	160-250	730	8-11	11	1
YA1836	1	6.5	6-50	≤200	150-250	730	8-11	11	1
2YA1836	2	6.5	6-50	≤200	200-300	730	8-11	15	1
YAH1836	1	6.5	30-150	≤400	250-600	730	8-11	11	1
2YAH1836	2	6.5	30-200	≤400	250-600	730	8-11	15	1
YA1842	1	7.3	6-50	≤200	220-400	730	8-11	15	1
2YA1842	2	7.6	6-150	≤200	280-500	730	8-11	15	1
YAH1842	1	7.6	6-150	≤400	250-800	730	8-11	11	1
2YAH1842	2	7.6	30-150	≤400	250-800	730	8-11	15	1
YA1848	1	8.6	30-150	≤200	150-525	730	8-11	15	1
2YA1848	2	8.6	6-50	≤200	150-525	730	8-11	15	1
YAH1848	1	8.6	6-50	≤0-150	350-1000	730	8-11	15	1
2YAH1848	2	8.6	30-150	≤400	350-1000	730	8-11	15	1
YA2148	1	10	30-150	≤210	180-630	730	8-11	15	1
2YA2148	2	10	6-50	≤210	180-630	730	8-11	18.5	1
YAH2148	1	10	6-50	≤400	270-1200	730	8-11	18.5	1
2YAH2148	2	10	13-200	≤400	270-1200	730	8-11	22	1
YA2160	1	12.6	30-150	≤200	230-800	730	8-11	22	1
2YA2160	2	12.6	3-80	≤200	230-800	730	8-11	22	1
3YA2160	3	12.6	6-50	≤200	350-1500	730	8-11	22	1
YAH2160	1	12.6	6-50	≤400	350-1500	730	8-11	22	1
2YAH2160	2	12.6	30-150	≤400	200-700	730	8-11	30	1
YA2448	1	11.5	6-50	≤200	310-1300	730	8-11	30	1
YAH2448	1	11.5	6-50	≤400	310-1300	730	8-11	30	1
2YAH2448	2	11.5	30-150	≤400	260-840	730	8-11	22	1
YA2460	1	14.4	30-150	≤200	260-840	730	8-11	30	1
2YA2460	2	14.4	6-50	≤200	260-840	730	8-11	30	1
3YA2460	3	14.4	6-50	≤200	400-1700	730	8-11	30	1
YAH2460	1	14.4	30-150	≤400	400-1700	730	8-11	30	1
2YAH2460	2	14.4	30-150	≤400	400-1700	730	8-11	30	1

DYK系列大型圆振动筛

DYK Series Circular Vibrating Screen



用途及特点 Applications and Features

DYK系列大型圆振动筛是最新设计的一种筛分机械，主要应用于煤炭、电力等行业，对各种物料进行分级处理。

该系列振动筛是综合了国外先进技术，并结合国内实际情况而设计的。筛机技术先进，处理能力大，筛分效率高。筛机使用块偏心振动器激振，轴承承载能力大，使用寿命长。振动器安装在侧板上，筛机受力状况好。筛机采用环槽铆钉联接，结构简单、牢固、性能可靠，检修维护方便。该系列振动筛采用钢制螺旋弹簧，过共振区运转平稳，噪声小。

DYK series circular vibrating screen is a kind of latest designed sieving machine, which is mainly used in coal and electric industries' to classify various material. This series vibrating screen is designed based on the advanced technology of screening machine at home and abroad, with large capacity, high sieving efficiency and long service life. The vibrator use eccentric block as vibration source. The vibrator is mounted on the side plate, which provides the vibrating machine a good stress state. The machine is jointed by ring-grooved rivets, its structure is simple, compact, firm, reliable, and easy to maintain. This series of vibrating machine uses rubber spring to buffer, which keeps the machine running smoothly with low noise when passing the resonance region.

选用注意事项 Notes

1. 本振动筛一般分为单层和双层两种形式，据用户工艺条件要求，也可以设计成三层或四层。
2. 筛网结构有编织筛网、冲孔筛板和弹性杆筛板等，用户可根据需要选择，在订货时应注明筛网结构。
3. 双层筛上层筛面选定的筛孔尺寸超过技术性能参数表中规定的筛孔尺寸时，可按用户要求设计。
4. 电动机(普通型Y, 防爆型YB)电压有380V和660V两种，可装在筛机的左侧或右侧。如无特殊要求，则按380V、Y型电动机左装供货(站在振动筛入料端后部看，左手边方向即为左装，右手边方向为右装)。
5. 选用时，如有改变筛面倾角的要求，可另行设计。
6. 基础螺栓或预埋钢板由用户自备。

1. It can be single or double decks, and also can be designed to three or four decks as customer's request.
2. Screen structure can be chosen as weaving, hole-making, polyurethane and so on, according to actual needs, please indicate when placing orders.
3. The upper screening surface mesh size of double layer vibrating screen can be designed as customer's requests if it exceeds the specified size.
4. Voltage of the motor (Common type Y series, explosion-proof type YB) can be 380V or 660V. The motor can be installed on the left or the right of the screen machine, if there is no special requirements, we will supply Y type motor with 380V.
5. If the sieving surface angle needs to change, Please state when placing order.
6. Foundation bolts or embedded steel plate supplied by user.

技术参数 Technical Parameters

型号 Model	筛面 Screening Surface				给料粒度 Feeding Grain Size (mm)	处理能力 Capacity (m³/h)	电机 Motor	
	层数 Decks	面积 Area (m²)	倾角 Inclination (°)	筛孔尺寸 Mesh Size (mm)			功率 Power (kw)	数量 Qty
DYK3045	1	13.5	20	3-80	<250	45-750	30	1
2DYK3045	2	13.5	20	上upper 25-100 下Lower 3-50	<300	375-1200	37	1
DYK3052	1	15.75	20	3-80	<250	45-750	30	1
2DYK3052	2	15.75	20	上upper 25-100 下Lower 3-50	<300	375-1200	37	1
DYK3060	1	18.0	20	3-80	<250	45-750	30	1
2DYK3060	2	18.0	20	上upper 25-100 下Lower 3-50	<300	375-1200	45	1
DYK3652	1	18.9	20	3-80	<250	54-860	45	1
2DYK3652	2	18.9	20	上upper 25-100 下Lower 3-50	<300	450-1440	30	2
DYK3660	1	21.6	20	3-80	<250	54-860	45	1
2DYK3660	2	21.6	20	上upper 25-100 下Lower 3-50	<300	450-1440	30	2
DYK3675	1	27.0	20	3-80	<250	54-860	30	2
2DYK3675	2	27.0	20	上upper 25-100 下Lower 3-50	<300	54-1440	37	2



新疆圣雄黑山煤矿安装现场
Xinjiang shengxiong Heishan Coal mine installation site