

» 矿山设备（制砂）系统 解决方案服务商

MINING EQUIPMENT (SAND MAKING) SYSTEM
SOLUTIONS PROVIDER

www.cementcrusher.com



河南省振源科技有限公司

Henan Zhenyuan Science & Technology Co.,Ltd.

Add: Xiaodian Industrial Park, Xinxiang, Henan

Tel: +86-373-3663336 +86-373-3663285

Fax: +86-373-3663296

Email: info@cementcrusher.com

Website: www.cementcrusher.com

河南省振源科技有限公司

Henan Zhenyuan Science & Technology Co.,Ltd.



公司介绍



河南省振源科技有限公司，是专业从事矿用机械设备的国家级高新技术企业，主要产品有：移动破碎站、制砂机、洗砂机、各种破碎机、振动筛、给料机及相关配件等。产品广泛应用于矿山、碎石、制砂、选矿等行业，远销东南亚、南亚等地区。凭着质量过硬的产品和周到的服务，积累了良好的市场信誉，并获得了广大客户的信任和好评。

地处黄河之北岸，国家新乡经济技术开发区，占地面积260亩，建筑面积10.9万平米。公司现有员工690人，其中行业专家3名，高级技术人员80人，中级技术人员120人，公司总资产4.38亿元。

公司拥有科学的质量管理体系和先进的产品质量检测手段，在同行业率先通过了ISO9001质量管理体系认证，产品质量始终保持同行业领先水平。公司拥有三十余项国家专利，曾多次荣获国家、省部级科技奖。

以“不断创新、服务至上、笃守信誉”为企业宗旨；以“创世界一流产品”为己任。公司坚持以市场为导向，以顾客满意为目的，追求卓越绩效并持续改进，以一流的产品，一流的服务创一流的业绩。热烈欢迎各界人士精诚合作，共同创造辉煌的明天，实现和谐共赢！

专心·专注·专业

ATTENTIVELY ABSORBED PROFESSIONAL



Company Introduction



Henan Zhenyuan Science & Technology Co.,Ltd. is a hi-tech enterprise specializing in manufacturing nonferrous metals and coal mining machine, Our main products include:crusher plant, sand making machine , sand washer, crusher, vibrating screen, vibrating feeder, which are widely used in coal, metallurgy, mine, electricity, chemical industry etc. Our products are exported to Southeast Asian countries, South Asian and other countries.We gained favorable comment and trust from customers with our high quality products and considerate service, winning buyer praise in the market.

Located on the north bank of the Yellow River, east of Xinxiang City,Our company occupies an area of 109,000.00 square meters, with 690 staffs, among which there are 3 specialists, 80 senior technicians and 120 middle class technicians, and capital asset ¥438.000.000.

We have scientific QC system and passed the ISO9001 quality control system, firstly among fellow companies. With advanced quality testing methods, our products in the industry has maintained the top level. More than 30 national patents have been awarded,and many science and technology prizes have been awarded by State and Provincial governments.

We abide by“ Unceasing innovation, excellent service, keeping reputation”, and always take the market as a guide, trying our best to satisfy customers, pursue super excellence and insist on continual improvement. To create prominent achievement with first-class products and first-class service. We are sincerely hope to cooperate with friends from home and abroad to create a glorious tomorrow and realize our common aim of “Harmony and Win-win”!

IMPROVER THE QUALITY SERVE THE WORLD

With high quality products and considerate service, our products have been exported to Southeast Asia, South Asia and other countries and regions, and continue to extend to the rest of the world in Africa, Europe, also establishing longterm and full cooperation, common development, hand in hand and winwin. We will always adhere to the ideas, enthusiastic attitude and integrity is reflected in presale, sale, aftersale services centers, and foreign sales service centers, technical centers, multilevel, multinetwork of fast and convenient service network, the product is worth the additional value to maximize, to show the world China power.

提升品质 服务全球

凭着质量过硬的产品和周到的服务，公司产品已经远销东南亚、南亚等国家和地区，并不断延伸至非洲、欧洲等世界各地，建立长期、全面的合作关系，共同发展，携手共赢。我们将坚持一贯的理念，以热情和诚信的态度体现于售前、售中、售后服务全过程，驻外销售服务中心、技术中心等多层次、多网点的快速便捷服务网络，使产品附加值得到最大化，向世界展示中国力量。




印度尼西亚客户



意大利客户



俄罗斯客户

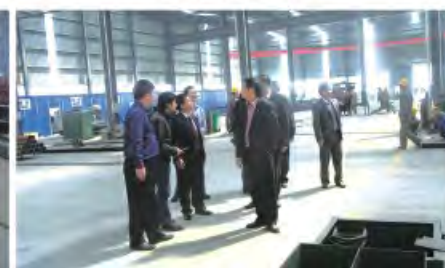

越南客户



土耳其客户




意大利·达涅利集团客户



阿尔及利亚客户



资质荣誉 Qualification Honors

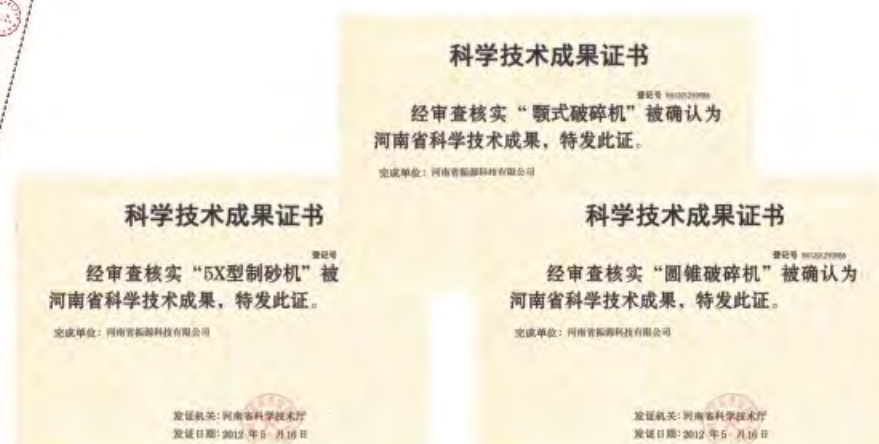

加工设备 Product Equipments



龙门镗床
Gantry Boring Machine



数显落地铣镗床
Significant Number Of Boring
And Milling Machine



抛丸机
Shot Blasting Machine



大型立车
Heavy Duty Vertical Lathe



大型卧式车床
Large Horizontal Lathe



大型热处理设备
Large-scale Heat Treatment Equipment



数控加工区
CNC Processing Area



龙门铣床
Gantry Boring And



数控等离子切割机
NC Plasma Cutting Machine

PF反击式破碎机

PF IMPACT CRUSHER

该系列反击破分为：二腔和三腔两个系列，能处理边长不超过500mm、抗压强度不超过250MPa的各种粗、中、细物料（花岗岩、石灰石、混凝土等）。工作时，在电机带动下，转子高速旋转，物料进入后与转子上的板锤撞击破碎，然后被反击到衬板上再次破碎，最后经出口排出。

Dealing with the material with the side length below 500mm, not more than 250MPa anti-pressure strength. Impact crusher can be widely used in crushing the coarse, medium, and fine material(E.g. granite, limestone, concrete). During the process of operating, the rotor at high speed will be brought along by the electric motor. The material will be impacted by the flat hammer to be crushed, and then be countered to the liner for the second crushing, then be discharged through the discharge opening.



性能特点 / PERFORMANCE FEATURE

- 1、具有过料、过铁保护功能，有效保护设备。
- 2、具有产品粒度调整功能。
- 3、液压、拉杆两种启盖方式，有效减低劳动强度。
- 4、采用独特楔块板锤锁紧机构，调整板锤方便快捷。
- 5、板锤设计，可双面使用，有效降低生产成本。
- 6、三腔设计，满足不同客户需求。
- 7、无键连接，机器运转更加稳定。

- 1.Overload and iron-removal protection system protects machine from damage.
- 2.Particle size adjustment function.
- 3.Two lid ways of hydraulic pressure and pull rod lid reduce labor intensity.
- 4.Adopts unique wedge block plate hammer retaining mechanism to make plate hammer adjust easier.
- 5.Both sides of plate hammer can be used, lower the cost.
- 6.Three cavity design could meet different kinds of requirements from clients.
- 7.Keyless connection makes crushing more stable.

工作原理 / WORKING PRINCIPLE

本机器是一种利用冲击能来破碎物料的破碎机械。当物料进入板锤作用区时，收到板锤的高速冲击使被破碎物不断被抛向安装在转子上方的反击装置上破碎，然后又从反击衬板上弹回到板锤作用区重新破碎。此过程重复进行，直到物料被破碎至所需粒度，由机器下部排出为止。调整反击架与转子架之间的间隙可达到改变物料出料粒度和物料形状的目的。

This machine uses impact to crush the raw material. When the material comes to zone of action of hammer plate, material will be pushed to impact device to be crushed under the force of impact, then material will bounce back to zone of action to be re-crushed, this process would not stop until the final products become to required size, the material will be discharged from bottom of machine. Adjusting the gap between impact rack and rotor rack could change the output size and shape of material.



PF反击破技术参数 / SPECIFICATION AND TECHNICAL PARAMETER OF PF SERIES IMPACT CRUSHER

型号 Model	规格 (mm) Specification	进料口尺寸 (mm) Size of Feed Opening	最大进料 粒度 (mm) Max. Feeding Size	生产能力 (t/h) Capacity	电动机型号 Model of Motor	电机功率 (kw) Power	重量 (t) Weight	外型尺寸长×宽×高 (mm) Overall Dimension (L×W×H)
PF-1007	Φ1000×700	400×730	300	35-50	Y250M-6	37	9.5	1800×1600×1800
PF-1010	Φ1000×1050	400×1080	350	50-80	Y315S-6	75	14	2340×2007×2500
PF-1210	Φ1250×1050	400×1080	350	70-120	Y315L1-6	110	17	2582×2053×2809
PF-1212	Φ1250×1200	400×1250	350	70-140	Y315L2-6	132	17.5	2582×2203×2809
PF-1214	Φ1250×1400	400×1430	350	80-160	Y315L2-6	132	22	2582×2403×2809
PF-1315	Φ1300×1500	680×1520	350	90-220	Y2-355M2-6	200	26	2930×2761×3053
PF-1320	Φ1300×2000	680×1570	350	110-350	Y2-355M2-6	280	28	3340×2950×3000

三腔反击破规格与性能参数表 / SPECIFICATION AND TECHNICAL PARAMETER OF IMPACT CRUSHER(THREE ADJUSTMENTS)

型号 Model	规格 (mm) Specification	进料口尺寸 (mm) Size of Feed Opening	最大进料 粒度 (mm) Max. Feeding Size	生产能力 (t/h) Capacity	电动机型号 Model of Motor	电机功率 (kw) Power	重量 (t) Weight	外型尺寸长×宽×高 (mm) Overall Dimension (L×W×H)
PFV-1007	Φ1000×700	400×730	300	25-45	Y250M-6	55	10.5	1800×1600×1800
PFV-1010	Φ1000×1050	400×1080	350	35-60	Y315S-6	75	14.8	2340×2007×2500
PFV-1210	Φ1250×1050	400×1080	350	45-100	Y315L1-6	110	18	2582×2053×2809
PFV-1214	Φ1250×1400	400×1430	350	60-140	Y315L2-6	132	23.5	2582×2403×2809
PFV-1315	Φ1300×1500	565×1600	350	70-180	Y2-355M2-6	200	28	2996×2701×2472
PFV-1320	Φ1300×2000	496×2100	350	110-300	Y2-355M2-6	280	30	3308×3205×2613